




## ELEVATION RAIL DETAILS

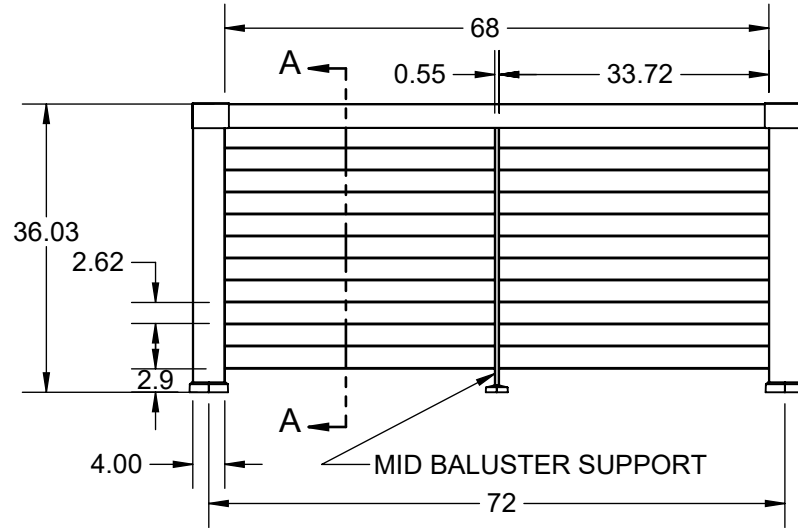

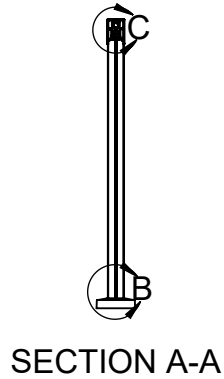

NOTE:  
 (A) FINISHED RAIL HEIGHT = 36"  
 (B) PANEL LENGTH = 68"  
 (C) MAX IRC SPAN = 72" X 36"

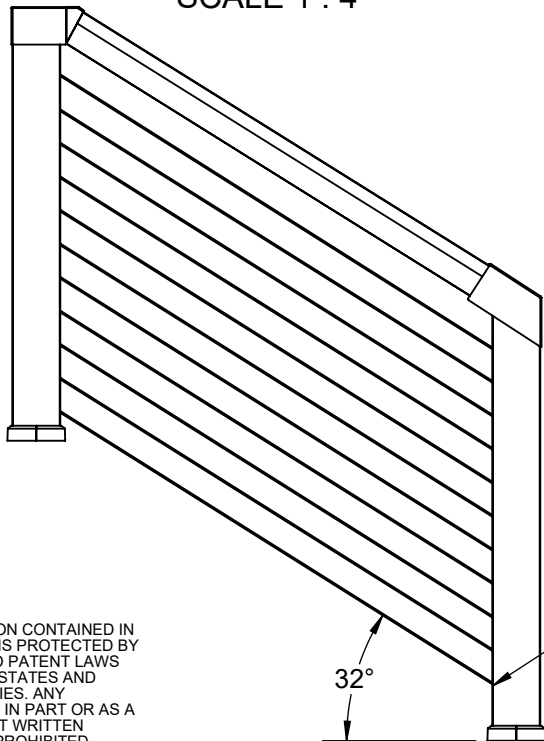

NOTE:  
 (A) MAX STAIR RAIL LENGTH = 60"


STAIR SECTIONS HAVE  
 A WORKING RANGE OF  
 26-38 DEGREES

THE INFORMATION CONTAINED IN THIS DRAWING IS PROTECTED BY COPYRIGHT AND PATENT LAWS OF THE UNITED STATES AND OTHER COUNTRIES. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT WRITTEN PERMISSION IS PROHIBITED.


<b>Barrette</b> OUTDOOR LIVING 		
DRAWN: CH	DATE: 05/11/2022	APPROVED:
DESCRIPTION: <b>ELEVATION LEVEL AND STAIR RAIL</b>		
SHEET 1 OF 7	REVISION	PART NUMBER
SCALE 1:24		N/A
WEIGHT: N/A		

# POSTS AND RAILS


CORNER

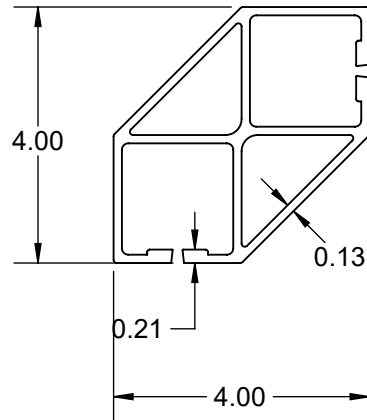


END

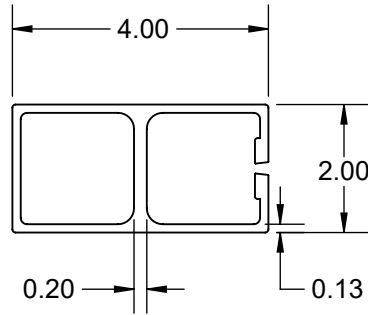


MID

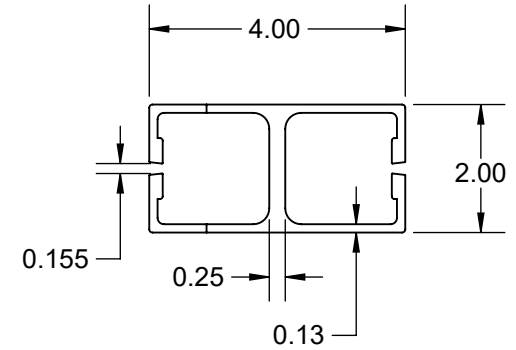

BEAM

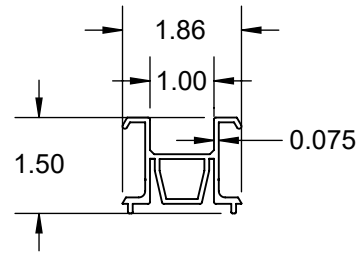





RAIL

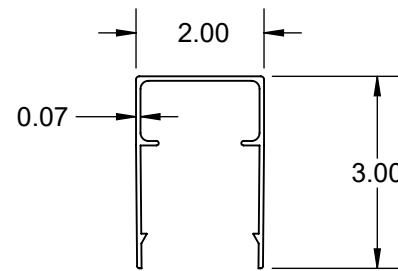

THE INFORMATION CONTAINED IN THIS DRAWING IS PROTECTED BY COPYRIGHT AND PATENT LAWS OF THE UNITED STATES AND OTHER COUNTRIES. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT WRITTEN PERMISSION IS PROHIBITED.

<b>Barrette</b> OUTDOOR LIVING		
DRAWN: CH	DATE: 05/11/2022	APPROVED:
DESCRIPTION: <b>POST AND RAIL DETAILS</b>		
SHEET 2 OF 7	REVISION	PART NUMBER
SCALE 1:12		N/A
WEIGHT: N/A		

## SURFACE MOUNT DETAILS

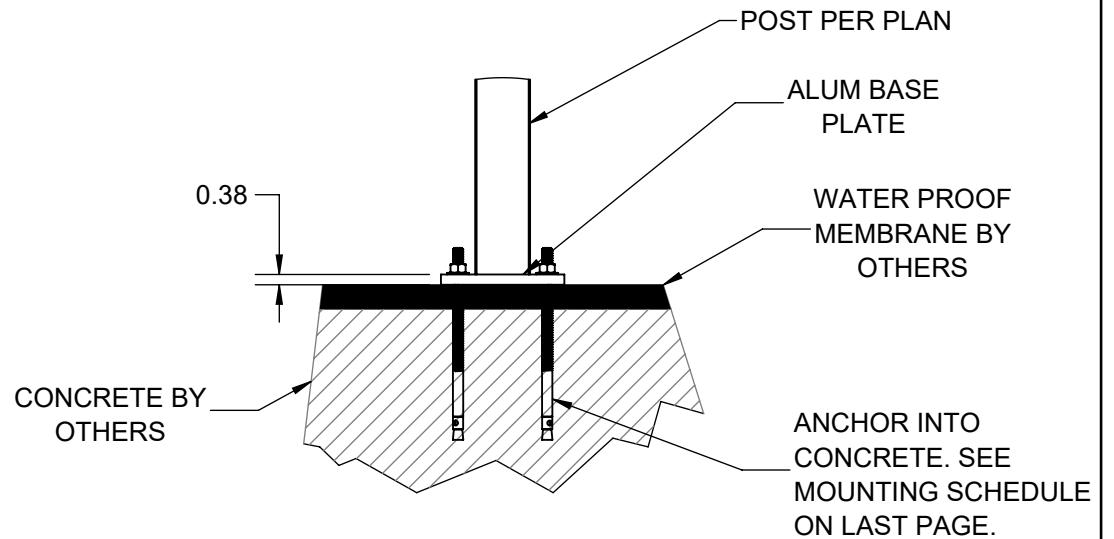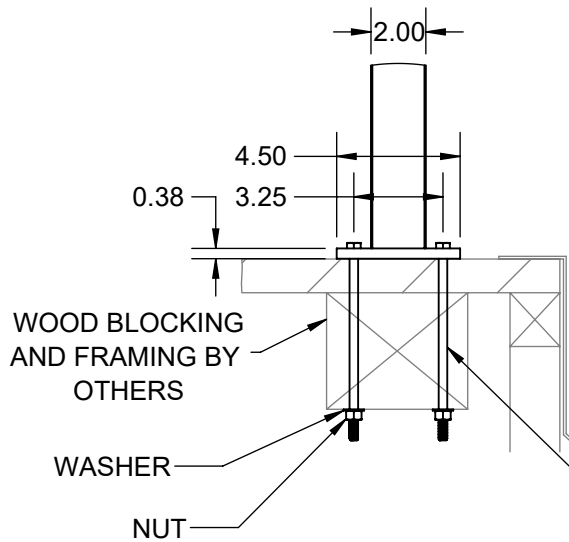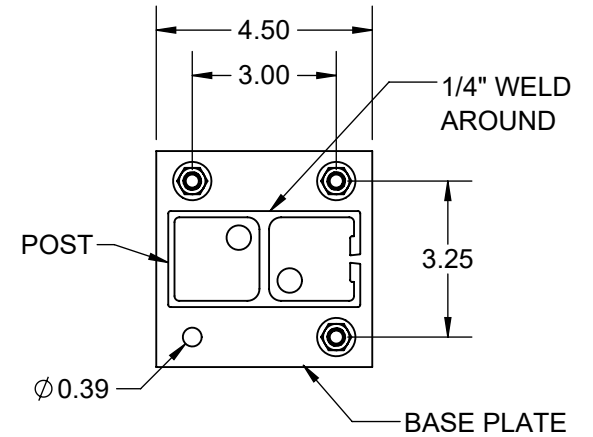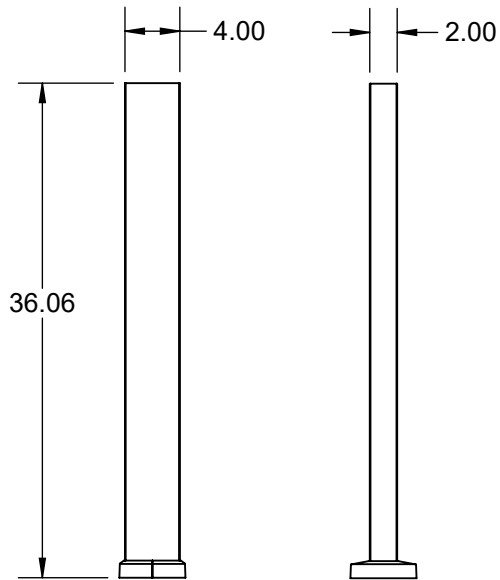


3/8" DIAMETER THROUGH BOLTS INTO SOLID WOOD .  
SEE MOUNTING SCHEDULE ON LAST PAGE.

THE INFORMATION CONTAINED IN THIS DRAWING IS PROTECTED BY COPYRIGHT AND PATENT LAWS OF THE UNITED STATES AND OTHER COUNTRIES. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT WRITTEN PERMISSION IS PROHIBITED.

<b>Barrette</b> OUTDOOR LIVING		
DRAWN: CH	DATE: 05/11/2022	APPROVED:
DESCRIPTION: <b>SURFACE MOUNT DETAILS</b>		
SHEET 3 OF 7	REVISION	PART NUMBER
SCALE 1:1		<b>N/A</b>
WEIGHT: N/A		

## SURFACE MOUNT DETAILS

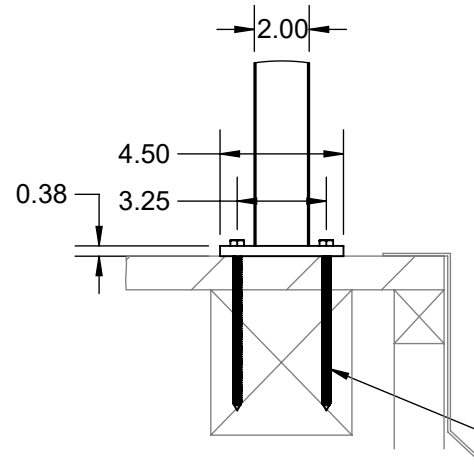


4 LAG BOLTS INTO SOLID WOOD 3/8" DIAMETER MINIMUM. SEE MOUNTING SCHEDULE ON LAST PAGE

THE INFORMATION CONTAINED IN THIS DRAWING IS PROTECTED BY COPYRIGHT AND PATENT LAWS OF THE UNITED STATES AND OTHER COUNTRIES. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT WRITTEN PERMISSION IS PROHIBITED.



<b>Barrette</b> OUTDOOR LIVING		
DRAWN: CH	DATE: 05/11/2022	APPROVED:
DESCRIPTION: <b>SURFACE MOUNT DETAILS</b>		
SHEET 4 OF 7	REVISION	PART NUMBER
SCALE 1:1		<b>N/A</b>
WEIGHT: N/A		

# BRACKETS & ACCESSORIES




## LEVEL CABLE GUIDES

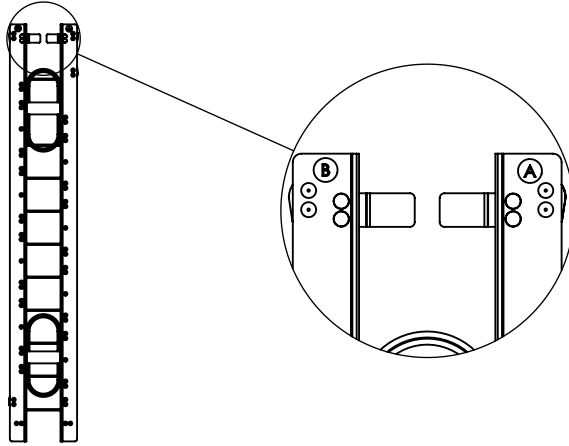

## STAIR CABLE GUIDES

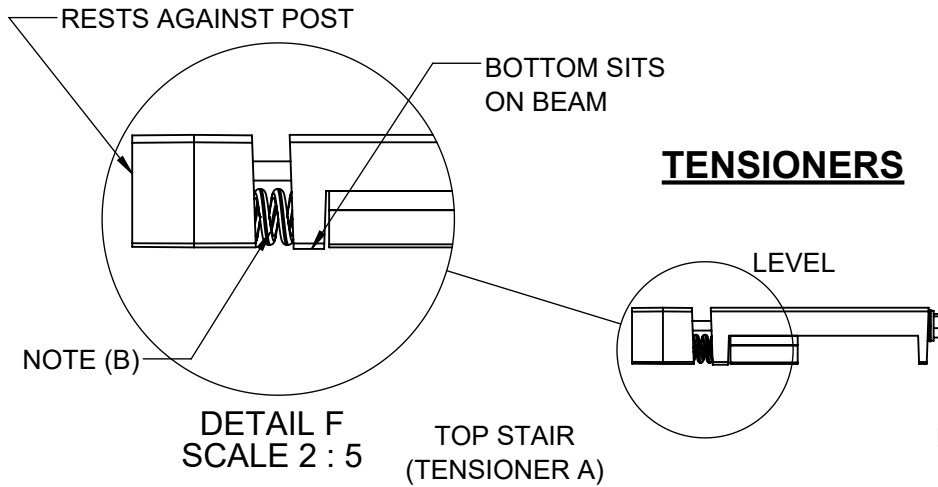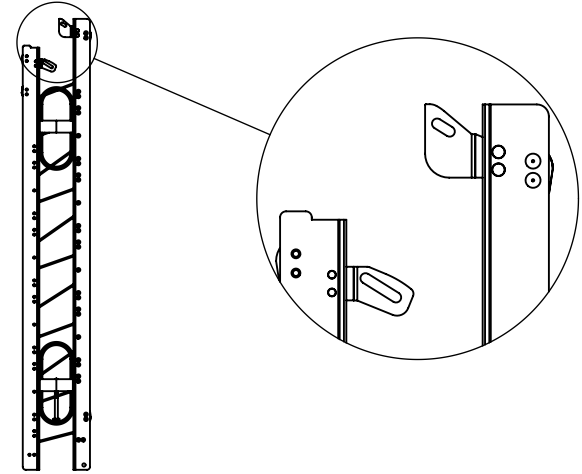

NOTE:  
 (A) 9/16" SOCKET OR WRENCH USED TO TURN BOLT TO TENSION CABLES  
 (B) SPRING WILL COMPRESS AND SPACE WILL CLOSE ONCE 250LB LIMIT IS REACHED




THE INFORMATION CONTAINED IN THIS DRAWING IS PROTECTED BY COPYRIGHT AND PATENT LAWS OF THE UNITED STATES AND OTHER COUNTRIES. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT WRITTEN PERMISSION IS PROHIBITED.

<b>Barrette</b> OUTDOOR LIVING		
DRAWN: CH	DATE: 05/11/2022	APPROVED:
DESCRIPTION: <b>BRACKETS &amp; ACCESSORIES</b>		
SHEET 5 OF 7	REVISION	PART NUMBER
SCALE 1:2	0	N/A
WEIGHT: N/A		


# BRACKETS & ACCESSORIES

## POST CAPS


LEVEL LINE CAP

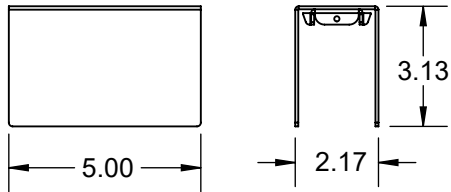


LEVEL END CAP

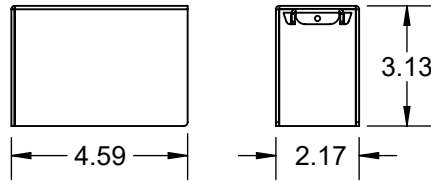


STAIR LINE CAP

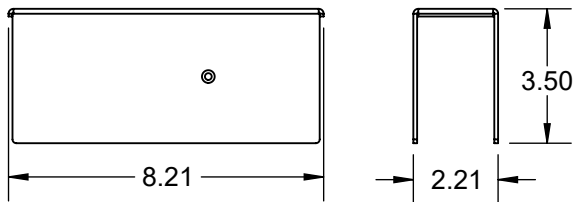


STAIR END CAP

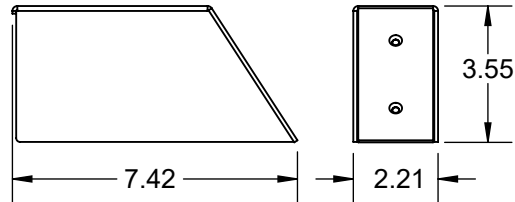

CORNER CAP

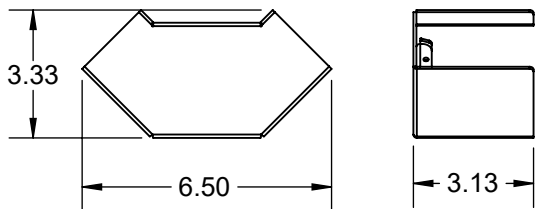


STAIR ADAPTER

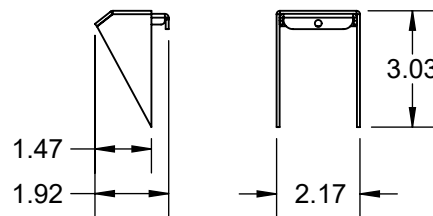


## POST TRIMS

LINE & END POST TRIM RING

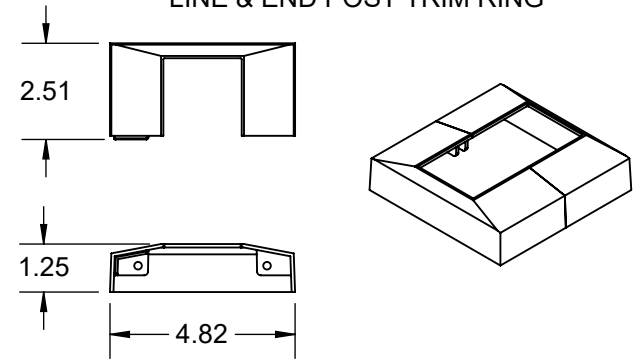

CORNER POST TRIM RING

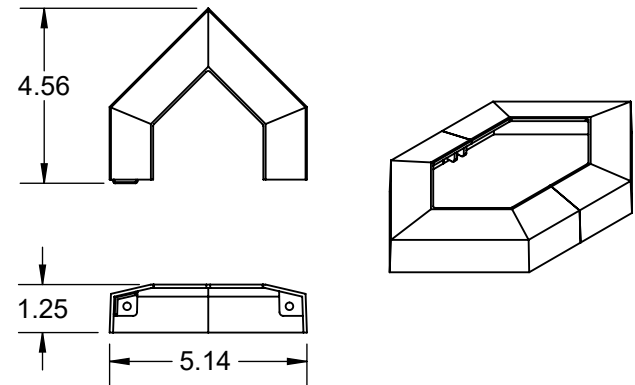


THE INFORMATION CONTAINED IN THIS DRAWING IS PROTECTED BY COPYRIGHT AND PATENT LAWS OF THE UNITED STATES AND OTHER COUNTRIES. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT WRITTEN PERMISSION IS PROHIBITED.

<b>Barrette</b> OUTDOOR LIVING		
DRAWN: CH	DATE: 05/11/2022	APPROVED:
DESCRIPTION: <b>BRACKETS &amp; ACCESSORIES</b>		
SHEET 6 OF 7	REVISION	PART NUMBER
SCALE 1:5	0	N/A
WEIGHT: N/A		

## MOUNTING SCHEDULE

FOR RESIDENTIAL APPLICATIONS 36" HIGH					
PANEL WIDTH	LOAD	RECOMMENDED BOLT APPLICATION	FOR LAG BOLT APPLICATION 3/8" DIA. SCREW. MINIMUM EMBEDDED SCREW THREAD LENGTH REQUIRED	FOR THROUGH BOLT APPLICATION	FOR CONCRETE ANCHOR APPLICATION 3/8" TITAN HD ANCHOR MINIMUM REQUIRED LENGTH (MINIMUM DISTANCE OF 4" FROM EDGE REQUIRED)
6FT	200LBS	LAG BOLT -OR- THROUGH BOLT -OR- CONCRETE ANCHOR	3IN	3/8" HEX BOLT 3/8" FLAT WASHER 3/8" LOCK WASHER 3/8" NUT	3IN
4FT			2.5IN		3IN

THE INFORMATION CONTAINED IN THIS DRAWING IS PROTECTED BY COPYRIGHT AND PATENT LAWS OF THE UNITED STATES AND OTHER COUNTRIES. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT WRITTEN PERMISSION IS PROHIBITED.

			
DRAWN:	CH	DATE:	05/11/2022
APPROVED:			
DESCRIPTION: <b>MOUNTING SCHEDULE</b>			
SHEET 7 OF 7		REVISION	PART NUMBER
SCALE 1:1		0	<b>N/A</b>
WEIGHT: N/A			