

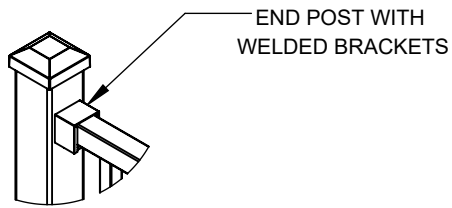



EXCALIBUR LEVEL AND STAIR RAIL DETAILS

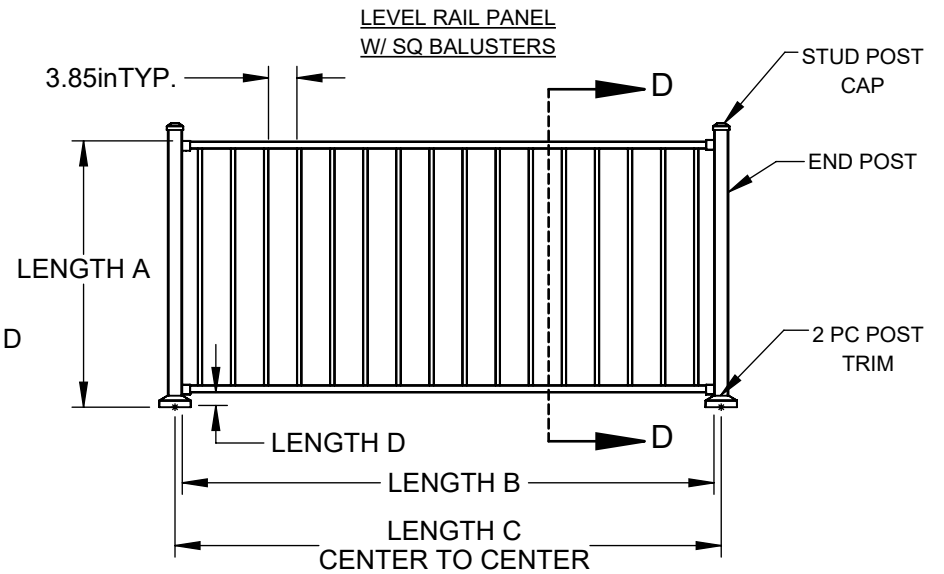

NOTES:
POST INCLUDES BRACKET
COVERS TO HIDE FASTENERS

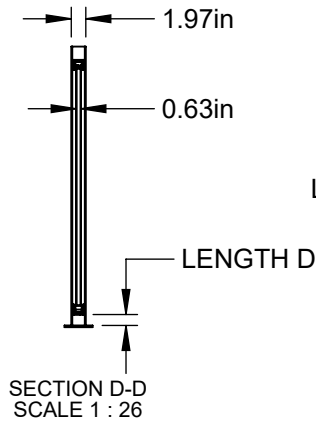

NOTES:
(A) FINISHED RAIL HEIGHT = 36", 38", 42"
(B) PANEL LENGTH = 71.75", 95.75", 119.75"
(C) MAX SPAN = 96.00" X 42 IBC, 96.00" X 36 IRC
(D) BOTTOM SPACE = 1.75", 3.75"

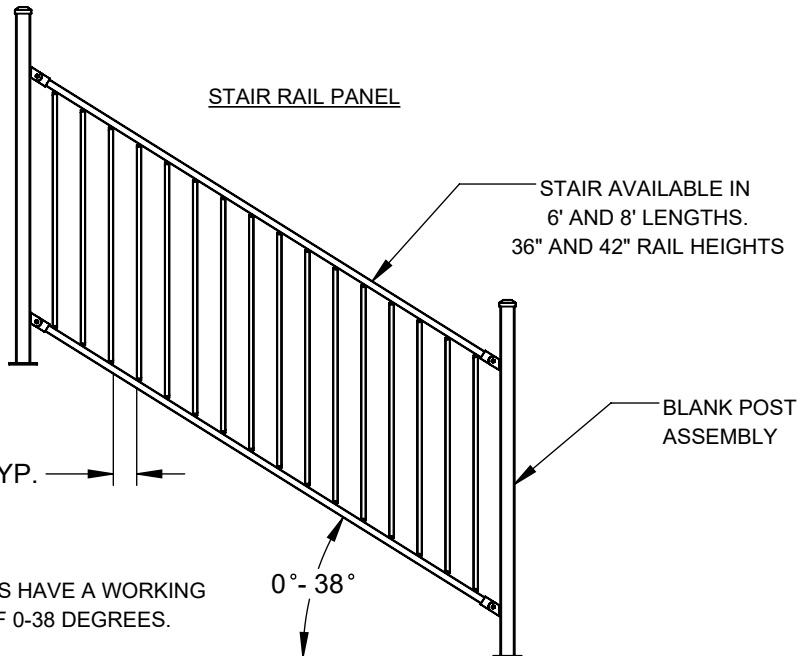


NOTES:
STAIR KITS HAVE A WORKING
RANGE OF 0-38 DEGREES.

THE INFORMATION CONTAINED IN
THIS DRAWING IS PROTECTED BY
COPYRIGHT AND PATENT LAWS
OF THE UNITED STATES AND
OTHER COUNTRIES. ANY
REPRODUCTION IN PART OR AS A
WHOLE WITHOUT WRITTEN
PERMISSION IS PROHIBITED.


TOLERANCES							
FRACTION	±1/16	DRAWN:	TB	DATE:	5/18/2021	APPROVED:	
XX	±0.01	DESCRIPTION:					
XXX	±0.005	EXCALIBUR LEVEL AND STAIR RAIL					
ANGLE	±1.0°	SHEET 1 OF 8		REVISION	PART NUMBER		
FINISH	125 RMS	SCALE: NTS			N/A		
UNLESS OTHERWISE SPECIFIED		WEIGHT: 43.67					

DECORATIVE PANEL


SERPENTINE
71.75"x34"

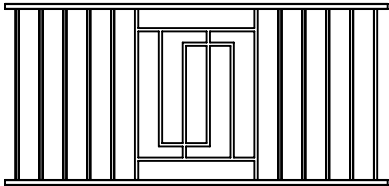


SERPENTINE
71.75"x40"

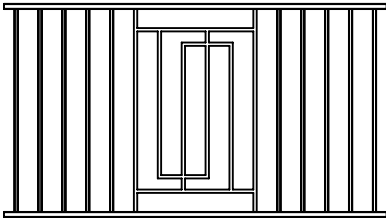


MOSAIC
71.75"x34"

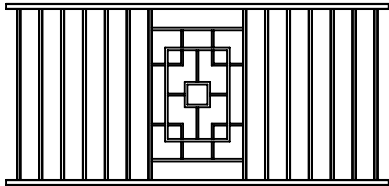


SERPENTINE
95.75"x34"

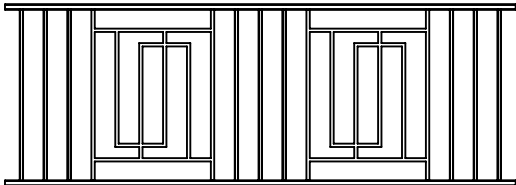


SERPENTINE
95.75"x40"

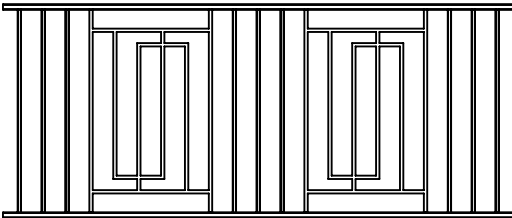


MOSAIC
95.75"x34"

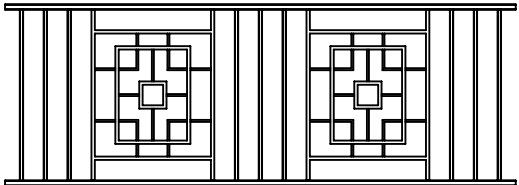

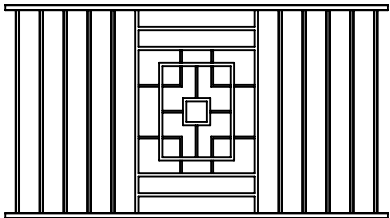

MOSAIC
71.75"x40"

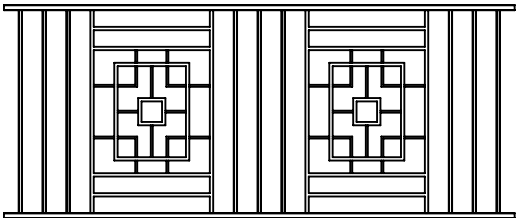


MOSAIC
71.75"x40"








THE INFORMATION CONTAINED IN THIS DRAWING IS PROTECTED BY COPYRIGHT AND PATENT LAWS OF THE UNITED STATES AND OTHER COUNTRIES. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT WRITTEN PERMISSION IS PROHIBITED.

TOLERANCES							
FRACTION	±1/16	DRAWN:	TB	DATE:	5/18/2021	APPROVED:	
XX	±0.01	DESCRIPTION:					
XXX	±0.005	DECORATIVE PANELS					
ANGLE	±1.0°	SHEET 2 OF 8		REVISION	PART NUMBER		
FINISH	125 RMS	SCALE 1:36			N/A		
UNLESS OTHERWISE SPECIFIED		WEIGHT: 43.67					

EXCALIBUR COMPONENT DETAILS

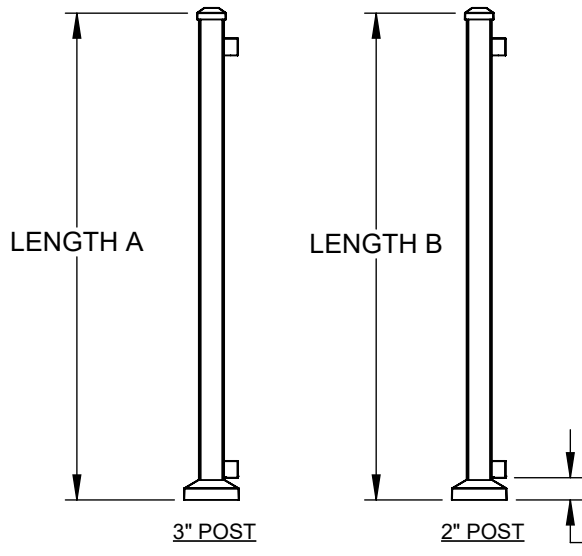


NOTES:
 A = 38", 40", 46"
 B = 38", 40", 44", 46", 48"
 C = 2.75", 3.75"




NOTE: BRACKET KITS INCLUDE (EXCEPT BLANK AND FASCIA POST), POST TOP, BRACKET COVERS, TRIM RING, VINYL SHIMS, HEX HEAD MOUNTING SCREWS, AND HEX BIT FOR ATTACHMENT TO STEEL OR WOOD POST.


FASCIA POST

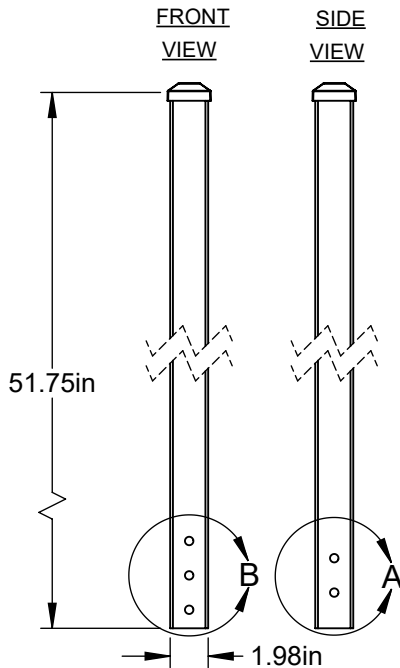



DETAIL B
SCALE 1 3.5

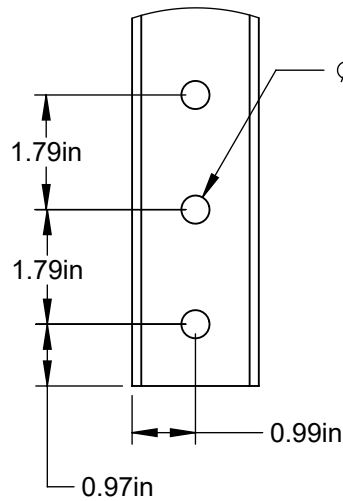



DETAIL A
SCALE 1 3.5

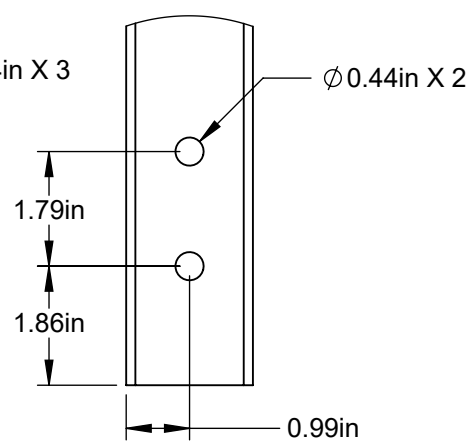

SCROLLWORK DECORATIVE LEVEL BRACKET



IMPERIAL DECORATIVE LEVEL BRACKET




THE INFORMATION CONTAINED IN THIS DRAWING IS PROTECTED BY COPYRIGHT AND PATENT LAWS OF THE UNITED STATES AND OTHER COUNTRIES. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT WRITTEN PERMISSION IS PROHIBITED.


TOLERANCES	
FRACTION	±1/16
XX	±0.01
XXX	±0.005
ANGLE	±1.0°
FINISH	125 RMS
UNLESS OTHERWISE SPECIFIED	

Barrette OUTDOOR LIVING			
DRAWN: TB	DATE: 5/18/2021	APPROVED:	
DESCRIPTION: EXCALIBUR COMPONENT DETAILS			
SHEET 3 OF 8	REVISION	PART NUMBER	
SCALE 1:16	△	N/A	
WEIGHT: 43.67			


EXCALIBUR COMPONENT DETAILS

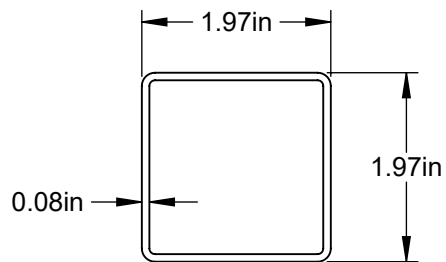


2" POST

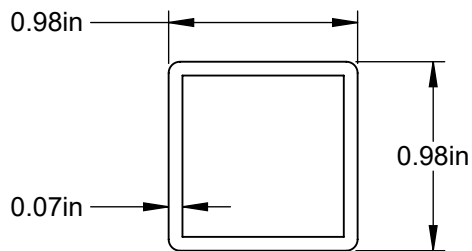


TOP / BTM RAIL

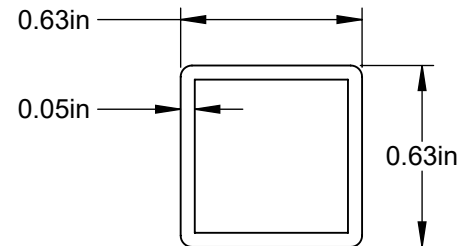


SQ BALUSTER

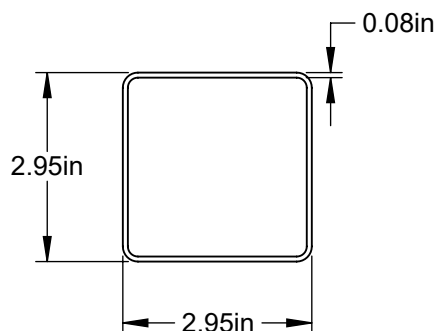

3" POST



FLUSH MOUNT BRKT




NOTE:
1. FLUSH BRKT USED TO ATTACH WOOD/DECK BOARD. FASTENERS ARE INCLUDED.

THE INFORMATION CONTAINED IN THIS DRAWING IS PROTECTED BY COPYRIGHT AND PATENT LAWS OF THE UNITED STATES AND OTHER COUNTRIES. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT WRITTEN PERMISSION IS PROHIBITED.


TOLERANCES		Barrette OUTDOOR LIVING					
FRACTION	±1/16	DRAWN:	TB	DATE:	5/18/2021	APPROVED:	
XX	±0.01	DESCRIPTION:					
XXX	±0.005	EXCALIBUR COMPONENT DETAILS					
ANGLE	±1.0°	SHEET 4 OF 8		REVISION	PART NUMBER		
FINISH	125 RMS	SCALE 1:16			N/A		
UNLESS OTHERWISE SPECIFIED		WEIGHT: 43.67					

EXCALIBUR POST MOUNT CONNECTIONS


FASCIA BRACKET

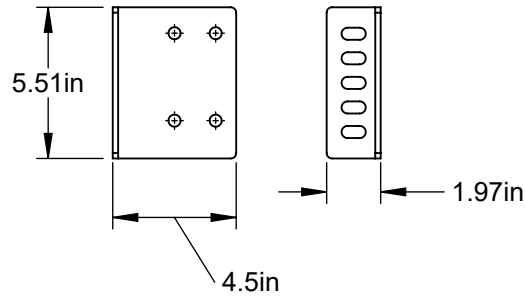


IN LINE POST




INSIDE CORNER MOUNT



OUTSIDE CORNER MOUNT




POST DETAILS WITH BOTTOM PLATE

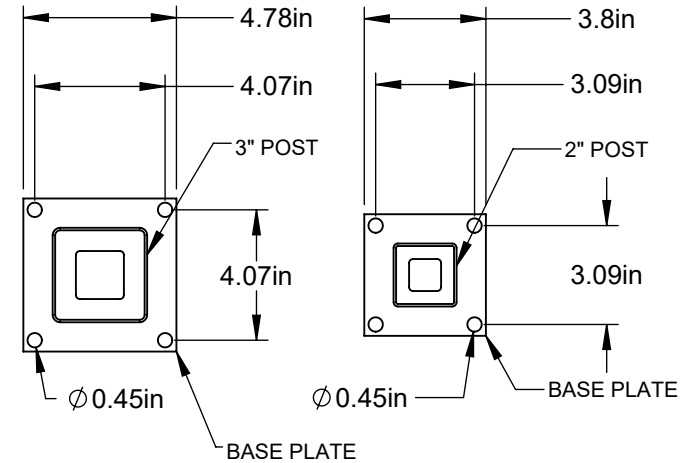


POST BASE CONNECTION INTO CONCRETE W/ WEDGE ANCHORS

8" MIN CRITICAL EDGE DISTANCE TYPICAL

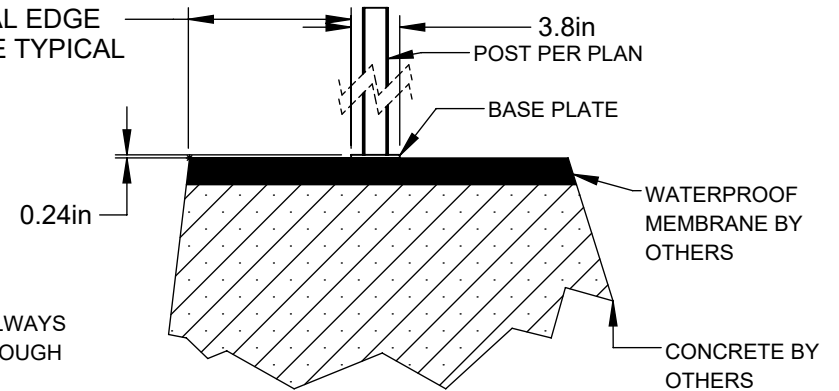

NOTE:
USE (4)-3/8"x7" LONG WEDGE ANCHORS USE SIMPSON SET EPOXY INTO CONCRETE WITH 5" EMBEDMENT DEPTH

POST BASE CONNECTIONS INTO WOOD WITH THRU BOLTS

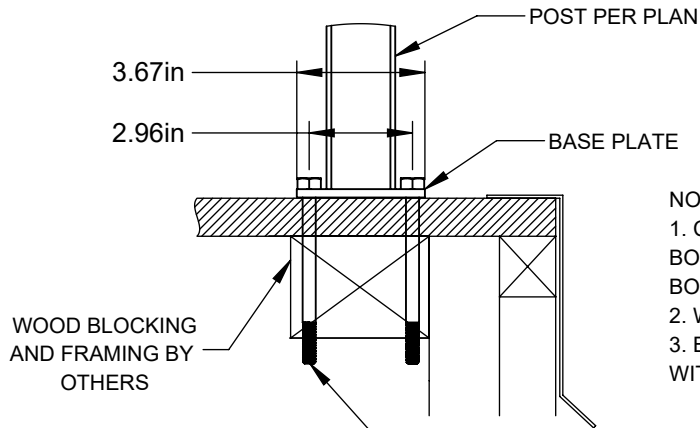


NOTE:
1. COMMERCIAL APPLICATIONS ARE ALWAYS BOLTED, USE 3/8" DIAMETER A307 THROUGH BOLTS INTO SOLID WOOD BLOCKING.
2. WOOD BLOCKING BY OTHERS.
3. BLOCKING MUST BE DESIGNED TO WITHSTAND PROPER LOADING.

USE 3/8" DIAMETER THROUGH BOLTS (MINIMUM LENGTH 5") INTO WOOD MEMEBERS WITH MINIMUM EMBEDMENT DEPTH OF 4" INTO SOLID WOOD.


THE INFORMATION CONTAINED IN THIS DRAWING IS PROTECTED BY COPYRIGHT AND PATENT LAWS OF THE UNITED STATES AND OTHER COUNTRIES. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT WRITTEN PERMISSION IS PROHIBITED.

TOLERANCES							
FRACTION	±1/16	DRAWN:	TB	DATE:	5/18/2021	APPROVED:	
XX	±0.01	DESCRIPTION:					
XXX	±0.005	EXCALIBUR POST MOUNT DETAIL					
ANGLE	±1.0°	SHEET 5 OF 8		REVISION	PART NUMBER		
FINISH	125 RMS	SCALE 1:16			N/A		
UNLESS OTHERWISE SPECIFIED		WEIGHT: 43.67					

EXCALIBUR LATITUDE LEVEL AND STAIR RAIL DETAILS

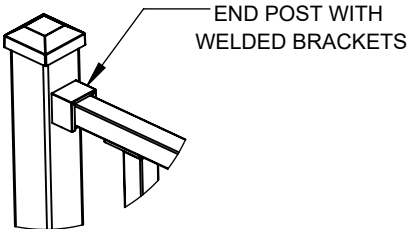


NOTES:
POST INCLUDES BRACKET
COVERS TO HIDE FASTENERS

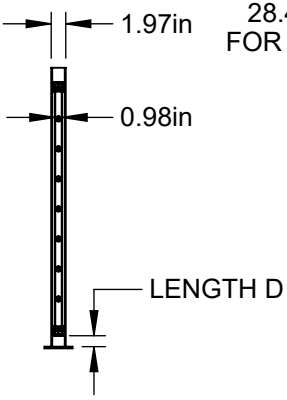


SECTION D-D
SCALE 1 : 26

28.43in TYP.
FOR 96" MODEL

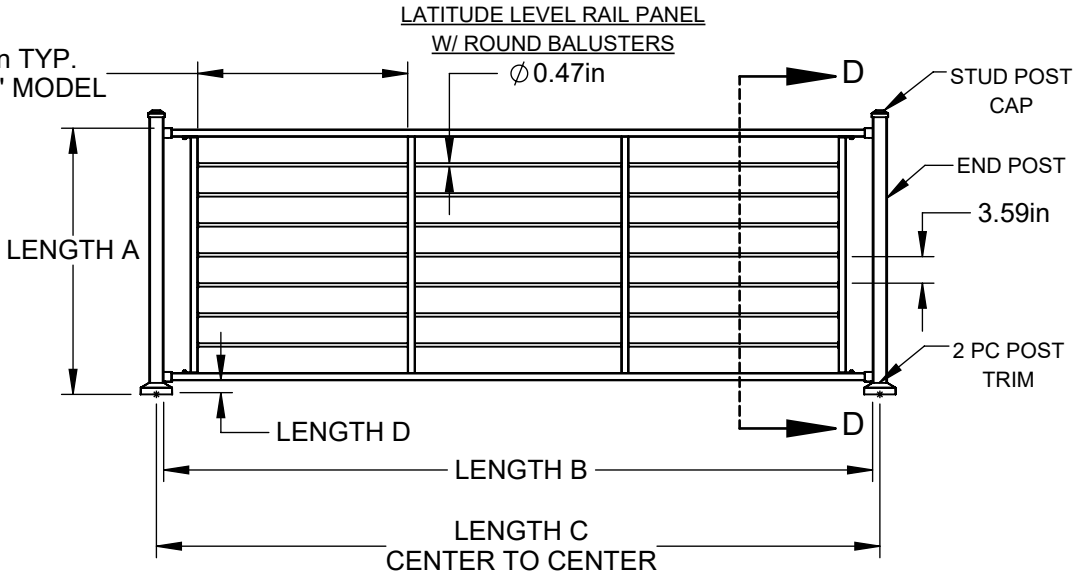

LATITUDE STAIR RAIL PANEL

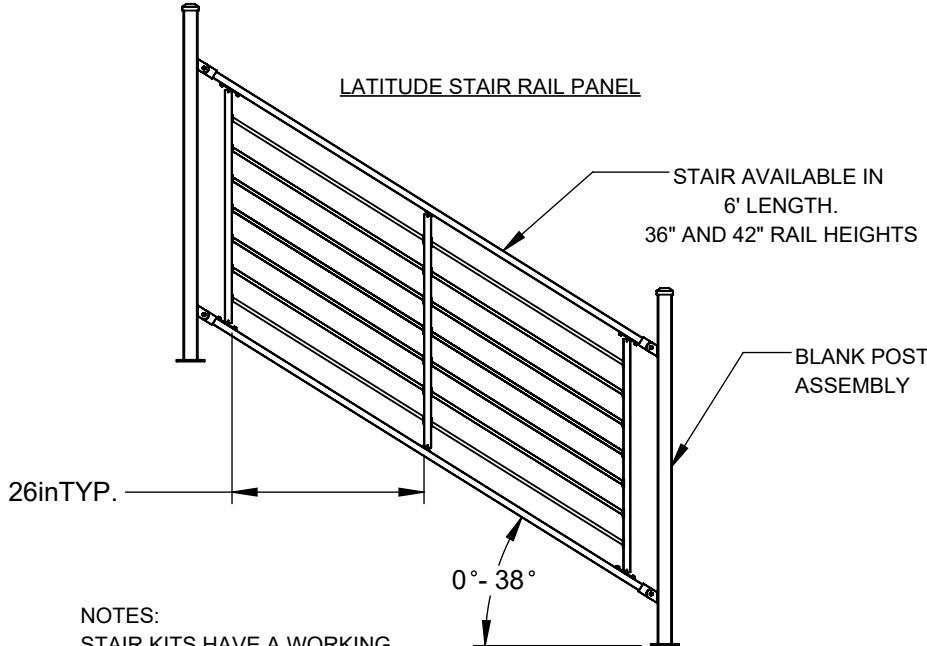

STAIR AVAILABLE IN
6' LENGTH.
36" AND 42" RAIL HEIGHTS


NOTES:
STAIR KITS HAVE A WORKING
RANGE OF 0-38 DEGREES.

NOTES:
(A) FINISHED RAIL HEIGHT = 36", 42"
(B) PANEL LENGTH = 71.75", 95.75"
(C) MAX SPAN = 96.00" X 42 IBC, 96.00" X 36 IRC
(D) BOTTOM SPACE = 1.75"
(E) 71.75" LENGTH HAS 1 MID SUPPORT.
95.75" LENGTH HAS 2 MID SUPPORTS.

THE INFORMATION CONTAINED IN
THIS DRAWING IS PROTECTED BY
COPYRIGHT AND PATENT LAWS
OF THE UNITED STATES AND
OTHER COUNTRIES. ANY
REPRODUCTION IN PART OR AS A
WHOLE WITHOUT WRITTEN
PERMISSION IS PROHIBITED.

TOLERANCES		Barrette OUTDOOR LIVING					
FRACTION	±1/16	DRAWN:	TB	DATE:	5/18/2021	APPROVED:	
XX	±0.01	DESCRIPTION:					
XXX	±0.005	EXCALIBUR LATITUDE RAILING					
ANGLE	±1.0°	SHEET 6 OF 8		REVISION	PART NUMBER		
FINISH	125 RMS	SCALE: NTS		0	N/A		
UNLESS OTHERWISE SPECIFIED		WEIGHT: 43.67					

EXCALIBUR POST AND SURFACE MOUNT DETAILS

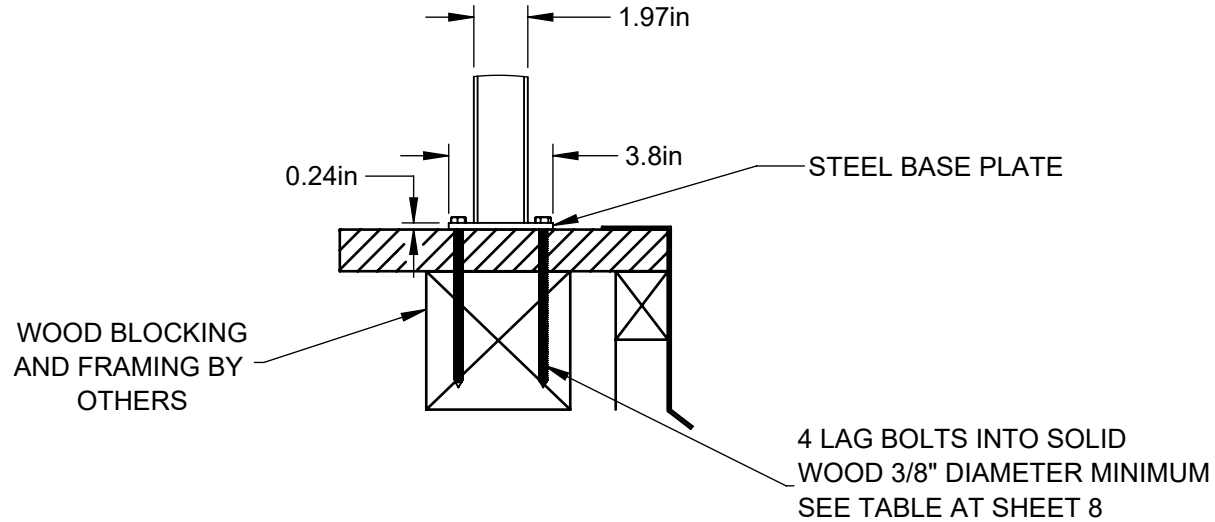

POST BASE CONNECTION INTO
WOOD WITH LAG BOLTS

- NOTE:**
1. WOOD BLOCKING BY OTHERS.
 2. BLOCKING MUST BE DESIGNED TO WITHSTAND PROPER LOADING.

THE INFORMATION CONTAINED IN THIS DRAWING IS PROTECTED BY COPYRIGHT AND PATENT LAWS OF THE UNITED STATES AND OTHER COUNTRIES. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT WRITTEN PERMISSION IS PROHIBITED.

Barrette OUTDOOR LIVING		
DRAWN: TB	DATE: 7/26/21	APPROVED: CH
EXCALIBUR POST AND SURFACE MOUNT DETAIL		
SHEET 7 OF 8	REVISION	PART NUMBER
SCALE 1:16		N/A
WEIGHT: N/A		

MOUNTING SCHEDULE

FOR RESIDENTIAL APPLICATIONS 36" HIGH					
PANEL WIDTH	LOAD	RECOMMENDED BOLT APPLICATION	FOR LAG BOLT APPLICATION 3/8" DIA. SCREW. MINIMUM EMBEDDED SCREW THREAD LENGTH REQUIRED	FOR THROUGH BOLT APPLICATION	FOR CONCRETE ANCHOR APPLICATION 3/8" TITAN HD ANCHOR MINIMUM REQUIRED LENGTH (MINIMUM DISTANCE OF 4" FROM EDGE REQUIRED)
8FT	200LBS	LAG BOLT -OR- THROUGH BOLT -OR- CONCRETE ANCHOR	3.5IN	3/8" HEX BOLT 3/8" FLAT WASHER 3/8" LOCK WASHER 3/8" NUT	4IN
6FT			3IN		3IN
4FT			2.5IN		3IN

FOR COMMERCIAL APPLICATIONS 42" HIGH					
PANEL WIDTH	LOAD	RECOMMENDED BOLT APPLICATION	FOR LAG BOLT APPLICATION 3/8" DIA. SCREW. MINIMUM EMBEDDED SCREW THREAD LENGTH REQUIRED	FOR THROUGH BOLT APPLICATION	FOR CONCRETE ANCHOR APPLICATION 3/8" TITAN HD ANCHOR MINIMUM REQUIRED LENGTH (MINIMUM DISTANCE OF 4" FROM EDGE REQUIRED)
8FT	400LBS	THROUGH BOLT -OR- CONCRETE ANCHOR	3.5IN	3/8" HEX BOLT 3/8" FLAT WASHER 3/8" LOCK WASHER 3/8" NUT	4IN
6FT	300LBS	LAG BOLT -OR- THROUGH BOLT -OR- CONCRETE ANCHOR	3IN		3IN
4FT	200LBS	LAG BOLT -OR- THROUGH BOLT -OR- CONCRETE ANCHOR	2.5IN		3IN



DRAWN:	JS	DATE:	1/22/2021	APPROVED:	CH
DESCRIPTION:					
MOUNTING SCHEDULE					
SHEET 8 OF 8		REVISION		PART NUMBER	
SCALE 1:16		0		N/A	
WEIGHT: N/A					

THE INFORMATION CONTAINED IN THIS DRAWING IS PROTECTED BY COPYRIGHT AND PATENT LAWS OF THE UNITED STATES AND OTHER COUNTRIES. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT WRITTEN PERMISSION IS PROHIBITED.